


Processing Equipment, Inc.
 1890 Star Shoot PKWY, STE 170
 Lexington, KY 40509
 Phone 866-973-7003 Fax 859-543-8534

Technical Data Sheet

Part Number	TDSF-1000736
Dimensions	12.75" X 8.375" X 26"H
Style	Cartridge, Open/Open
Media	Synthetic (Polyester/Glass)
Frazier Permeability	25
Fractional Efficiency	99.99 on 1 micron particles*
Pleats	155
Surface Area	110 Square Feet
End Caps	Galvanized Metal
Inner Support	Galvanized Helix Metal
Outer Support	Qty (2) Polyester bands
Gasket	1/2" x 1/2" polyisoprene
Temperature Rating	225 F

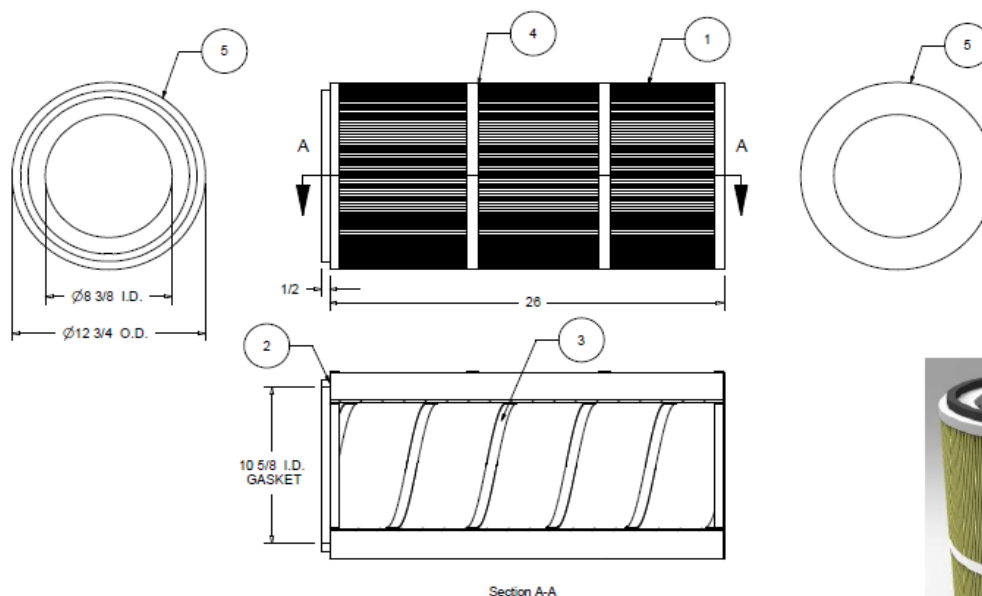

**Fractional efficiency is measured after 350 hours of operation. Actual efficiency of the filter may vary based on the application. Efficiency will also be affected by dust concentration, size of the particle, the airflow and the cleaning methods.*

PROAIRSUPPLY ΔP FILTERS
MADE IN THE USA